

Fact Sheet

BIZERBA

iL Professional 6000F/MP

Precision and best cleaning - The load receptors of the iL Professional series not only stand out in terms of their robust design but also due to a high weighing accuracy. Due its easy-to-clean construction by means of its load platters which can be lifted up the load receptors can also be used in hygienically critical environments.




More information
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Weighing range	1,500-3,000 kg	Interval: 500-1,000 g
Load capacity	6,000 kg	Load platter
Load cells	SB4	up to 3,000e Design load 1: 6,000 kg Design load 2: 4,500 kg Design load 3: 3,000 kg Wheel load: 1,000 kg Axle load: 2,000 kg
Dimensions	1,500x1,250 mm 1,500x1,500 mm 1,500x1,250 mm 2,000x1,500 mm	Load frame
Overall height	87 mm	Level adjustment by means of foot screws, approx. + 5 mm
Materials	V2A V2A, checkered plate	Load frame and load platter Load platter
Mounting method	Freestanding with / without drive-on ramp Built-in scale pit	
IP rating	IP68	Load cells and cable junction box
Explosion-proof version	Zone 1/21 Zone 2/22 No explosion-proof version for painted version	Load cells in Ex ib version for Ex zone 1/21 Additional plate for Ex zone 2/22
Options	Facts	Details
Load platter version	Screwed For lifting up / multi-sectional	onto load frame

Info graphics



Symbols

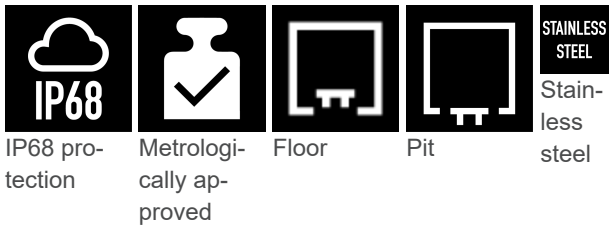

Dimensional drawings

Bizerba SE & Co. KG
Wilhelm-Kraut-Straße 65
72336 Balingen

T +49 7433 12-0
fax: +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com