

Fact Sheet

LabelSecure S

BIZERBA

Visual label inspection: LabelSecure offers you a unique inspection performance for different products. The Vision inspection system checks labels for complete and correct information and intactness. As needed, LabelSecure is available for 100% control or for sampling.



More information
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Functions	<ul style="list-style-type: none"> Checking of presence, position and orientation of labels Comparison of read texts with specified texts Reads information such as characters and codes on top and/or bottom of the package Checks matching of labels Checks barcode readability Checks color of the package Label check through sampling 	Independent of printing technology (ink-jet, thermal transfer, laser)
Scanner unit	<ul style="list-style-type: none"> One to two sensors Protected against ambient light and manipulations 	No external influences on the inspection results
Dimensions	<ul style="list-style-type: none"> 570 mm x 570 mm x 557 mm 570 mm x 570 mm x 966 mm 	<ul style="list-style-type: none"> Closed Open
Housing	Design according to hygiene requirements	<ul style="list-style-type: none"> EHEDG certified components Inclined surfaces for drainage of washing water
Package size	<ul style="list-style-type: none"> min. 60 mm x 60 mm x >5 mm max. 210 mm x 280 mm x 180 mm 	<ul style="list-style-type: none"> W x L x H W x L x H
IP rating	IP65	The optical inspection components are integrated in a tightly sealed housing
Processing system	Industrial PC	<ul style="list-style-type: none"> Operating system: Windows Embedded Standard 10 Processor Intel® Celeron 3955U
Interfaces	<ul style="list-style-type: none"> 3 USB 2 Ethernet 	Connection to customer network via Ethernet (TCP/IP possible)
Power supply	<ul style="list-style-type: none"> 230 V AC, 50 Hz 110 V AC, 60 Hz 	Open to other local voltage with a transformer
Ambient temperature	1 °C to 35 °C	
Humidity	Max. 85 %, non-condensing	
Maintenance	Scanner can be replaced by user	
Options	Facts	Details
Accessories	Mobile work table	
Software	<ul style="list-style-type: none"> The measuring results of other control units (tightness, gas concentration measurement, weight, temperature) can be added to the report Compatible with BRAIN2 	


Info graphics



Symbols



Dimensional drawings

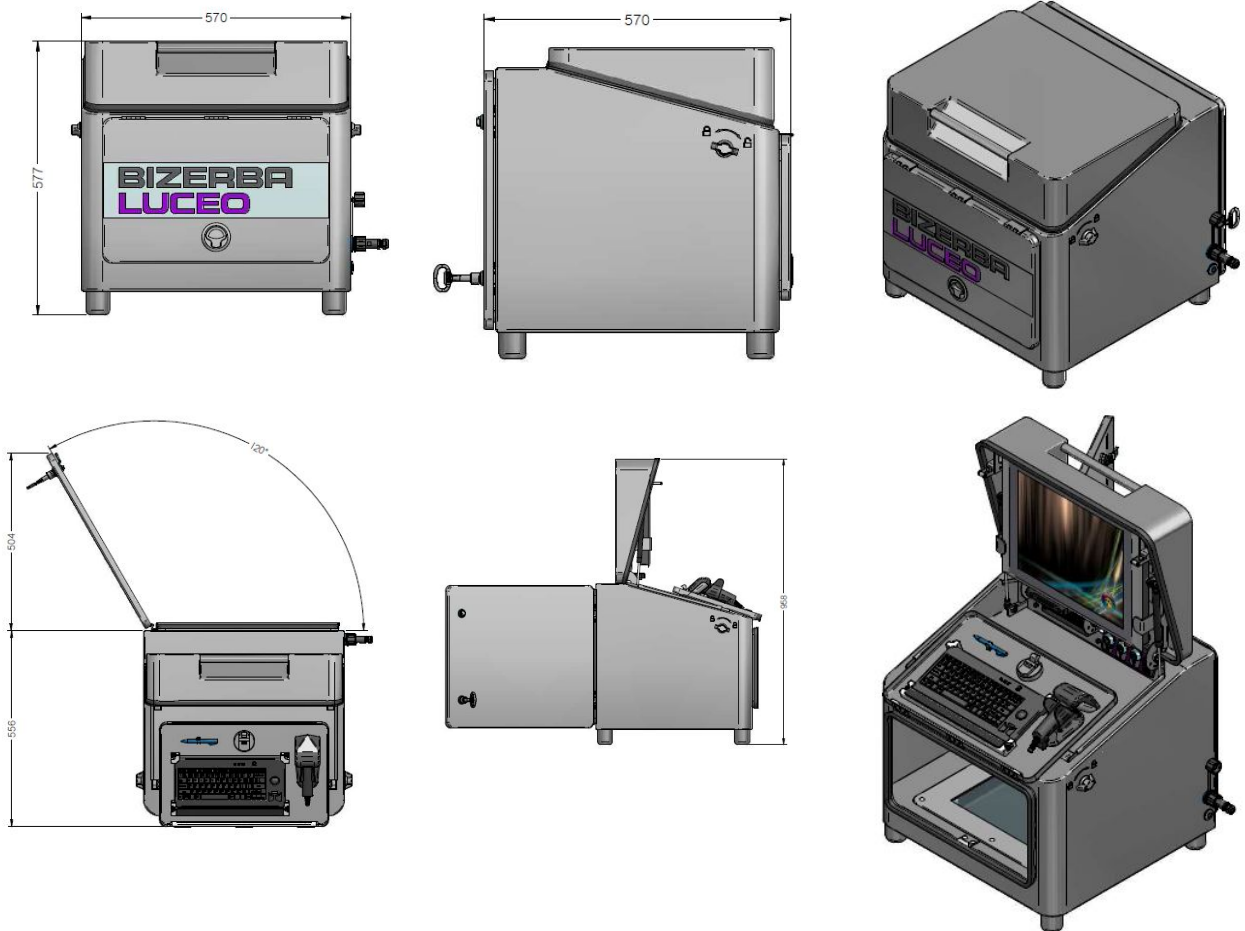

Bizerba SE & Co. KG

Wilhelm-Kraut-Straße 65
72336 Balingen

T +49 7433 12-0
fax: +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com